



# SUNLITE®

Available in Two Colors\*  
& Two Light Transmission Levels


Accessories to  
Complete Your Project




**“H” Channel**  
A clear connector used to join two panels in vertical glazing applications.



**“U” Channel**  
A clear connector used to cap either a “fluted” or “non-fluted” edge for a clean, finished look.



**2 Piece Base and Cap Connector**  
Clear base attaches to continuous wood or steel in sloped or vertical applications and then the cap is snapped in place.



**Edge Seal Tape AntiDUSTape®**  
Non-vented tape seals “fluted” edge of panels, is easy to apply, ensures condensation drainage, and blocks out dust and insects



**2" Fasteners**  
Protite 2" fastener with 3/4" washer.

AntiDUSTape® is available as single rolls; the nonvented top of panel roll in 160' or the vented bottom of panel roll, which is available in 110' rolls. Additionally, a combo pack is available with 32' rolls of both vented and non-vented.



## SUNLITE®

Polycarbonate Multiwall Panels




## Beauty, Durability, & UV Protection

- Blocks 100% of harmful UV rays
- Good fire performance rating
- Excellent thermal insulation
  - High impact resistance
  - Virtually unbreakable
  - Rigid & lightweight
  - Easy to work with

### Regulatory Code Compliance Certification

Organization	Standard	Classification
CCMC	National Building Code (NBC) (Canopy Covering)	Compliant (CCMC Eval. Rep. 13450-R)
ICC (Int'l Code Council)	International Building Code (IBC) (Light Transmitting Plastics)	ESR-1893

For detailed information on physical properties, please visit [palram.com/us](http://palram.com/us)



**Clear**  
84% Light  
Transmission



**Opal White\***  
35% Light  
Transmission

\*Special order color. Minimums apply.


### Available Sizes

48" W x 96" L    48" W x 120" L\*    48" W x 144" L

Note: Fluting runs top to bottom in the “length” dimension.

\*Available by special order.

### 8 MM Profile Dimensions



# SUNLITE®

SUNLITE features the incredible strength and impact resistance of polycarbonate, and also benefits from an air layer that dramatically increases its insulation characteristics. This yields a strong, insulating, lightweight, attractive sheet that’s perfect for many DIY applications.

- Glazing
- False ceilings
- Seed boxes
- Basement windows
- Room dividers and partitions
- Breezeways
- Patio covers
- Sun rooms
- Greenhouses
- Skylights
- Covered walkways
- Swimming pool enclosures



## SUNLITE®

POLYCARBONATE MULTIWALL PANELS  
**10-Year Limited Warranty\***

SUNLITE is warranted for 10 years against hail damage, yellowing and loss of light transmission. The above warranty shall apply only if the panels are installed, used and maintained in accordance with Palram recommendations and specifications.

\*Visit [palram.com/us](http://palram.com/us) for complete warranty details or call 800-999-9459.

Distributed by:



Distributed By EZ Outdoor Coverings



833-937-9918



[sales@ezoutdoorcoverings.com](mailto:sales@ezoutdoorcoverings.com)



235 Grimley St, Kutztown, PA 19530 PO BOX #: 82290

[palram.com/us](http://palram.com/us)



[palram.com/us](http://palram.com/us)



Before You Begin

Snow, wind and weather loads should be considered when determining the slope degree of your structure (Min. 2" in 12"). Before installation, check local building codes for relevant specifications and recommendations. Follow local codes at all times.



**TRANSPORTATION, HANDLING AND STORAGE:** Do Not transport, leave or store panels in direct sun before or during installation. For outdoor storage, cover securely with a white opaque polyethylene sheet to avoid solar heat gain between the panels. The sun's light is magnified when passing

through uncovered sheets increasing the temperature of the sheets which leads to degradation and distortion. Penetration of water between the sheets in storage will intensify this heat gain. Therefore, it is recommended to store the panels indoors. Panels will withstand heat when properly installed and venti-lated. Store the panels against a wall so that the flutes run vertically, or stacked evenly on a horizontal flat surface with longer lengths on the bottom. Do not stack other items on top of panels. If panels are not stacked directly on floor, be sure to support evenly.

**FLEXIBLE ENOUGH FOR CURVED STRUCTURES:** SUNLITE panels may be used in curved applications, as long as the radius of the curve is not less than 20 feet.

**BE SURE TO CAREFULLY READ ALL INSTRUCTIONS**

Installation details for proper construction

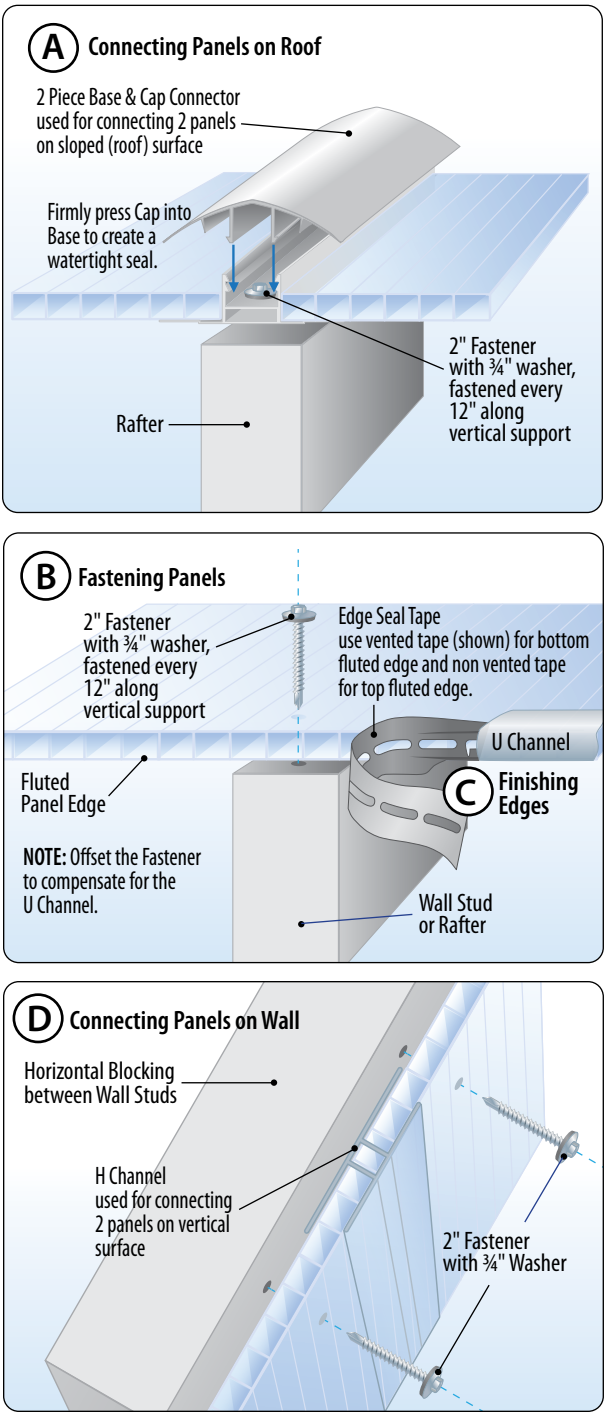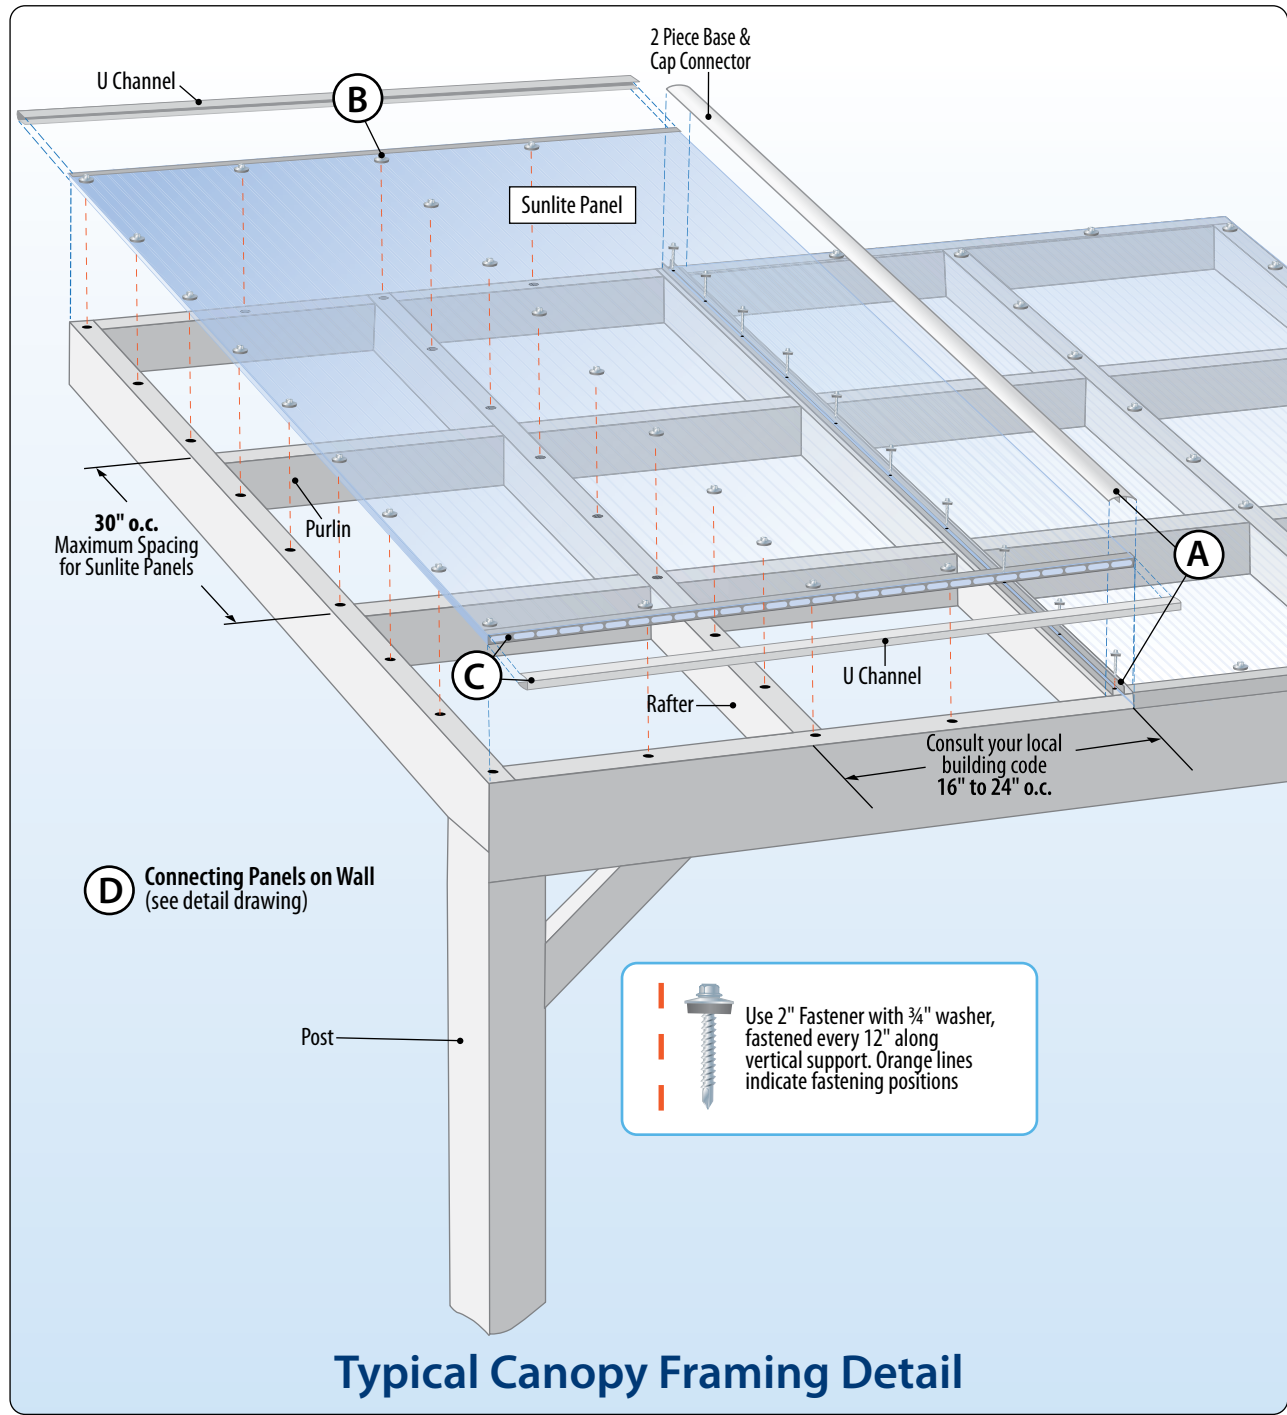

**SAFETY:**

Never walk on sheets.

Use a board placed across at least three rafters to spread the load

INSTALLATION NOTES

- Install panels with the label side facing toward the sky.**
- To Cut Panels:** For cuts perpendicular to the flutes, use a circular saw with a minimum of 10 teeth per inch. Support the sheet to avoid vibration and cut at a slow speed. Remove saw dust from within the flutes by blowing compressed air into the flutes. For cuts parallel to the flutes, use a utility knife and straight edge.
- Pitch:** This is the amount of height in inches the rafter rises over a 12" run. Minimum slope is 2" in 12". Never install panels on flat roofs.
- Purlins/Cross Supports:** Cross supports (purlins) must be no more than 30" apart for SUNLITE.
- EdgeSeal Tape:** Use to cover the fluted edges of SUNLITE panels to seal out debris. NOTE: AntiDUSTape® comes in both non-vented (for top edge of panels) and vented (for bottom edge of panels) to allow drainage.
- 2 Piece Base and Cap Connector:** Used to connect 2 panels installed as roof surfaces (see detail A).
- "U" Channel:** Covers the AntiDUSTape® on the fluted edges of the panel. Can be used on the non-fluted edges for a clean appearance (see detail C).
- "H" Channel:** Used to connect 2 panels mounted vertically for walls, fences, partitions, etc. (see detail D).
- Sealants:** For SUNLITE sheets, it is recommended you use a 100% silicone sealant, or any sili-cone sealant/adhesive that is recommended for polycarbonate material.

**Ventilation:** Ventilation is recommended to avoid condensation and heat build up in an enclosed structure.

**Fasteners:** Use Palram fasteners with special EPDM washers only.

Pre-drill all fastener holes with a 3/16" drill bit to accommodate for the thermal movement of the panel. Longer length sheets should have holes overdrilled. Failure to accommodate thermal movement will cause buckling of the sheet. Attach fasteners every 12" in the vertical direction. In high wind areas, fasten **every 8"**. Use 2" fasteners for all roof applications. DO NOT overtighten fasteners causing the rubber washer to compress.

**TIP:** Tighten all fasteners until they are "snug". If the gray EPDM washer becomes deformed, the fastener is too tight!

**Care And Maintenance:** Avoid contact with chemicals, paints, adhesives or other synthetic materials that are incompatible with polycarbonate. Never use glass cleaners with ammonia, or ammonia based products. Clean with lukewarm soapy solution using a soft cloth or sponge. Do not use abrasive brushes as these will mark the surface.

**Protite 2" fastener** with 3/4" EPDM washer.

**INCORRECT** (deformed washer)

**CORRECT** (properly seated washer)

Installation Overview