



MAKE YOUR
OUTDOOR SPACE
MORE LIVABLE.
YEAR ROUND.



SUNTUF®

Corrugated Polycarbonate Sheet

**The # 1 Corrugated
Polycarbonate Panel.**

Enjoy your outdoor spaces, rain or shine, by installing the industry-leading corrugated roofing solution for home improvement projects.

Better Outdoor Living, Rain or Shine

Suntuf corrugated polycarbonate panels are the perfect roof covering for your deck, patio or pergola project. Super tough and easy to install, Suntuf panels enhance and protect your outdoor spaces year-round!



Virtually
unbreakable



Blocks 100%
of UV rays



Options that
block up to
90% sunlight



Long-term
weather
resistance



Easy
installation



Lightweight



15+ colors
available



High snow
load capacity

BACKED BY A LIFETIME LIMITED WARRANTY

Typical Uses Around The Home



- Canopies
- Awnings
- Skylights
- Walkway covers
- Greenhouses
- Car ports
- Deck & patio covers
- Porch roofs
- Pool enclosures
- Pergola covers
- Animal shelters
- Tool sheds



**LONG-LASTING,
ALL-WEATHER PROTECTION.
YEAR ROUND.**



Available in a Variety of Colors* & Light Transmission Levels

Color	Light Transmission	
	Clear	90%
	Sea Green	80%
	Sky Blue	55%
	White Opal	45%
	Solar Grey	35%
	Bronze	35%
	Smooth Cream	30%
	Misty Green	20%
	Solar Control Silver	20%
	Hunter Green	Minimal
	Red Brick	Minimal

*To see all available colors, visit suntuf.com.


Standard Sizes

Available in
26" wide – 6', 8', 10' and 12'
49.6" wide – 8', 12' and 16'
Custom sizes available, subject to minimum quantities.

*Not all colors available in all sizes, & some colors & sizes available by special order only. Consult with retailer for details or contact Palram at (800) 999-9459.




Accessories to Complete Your Project

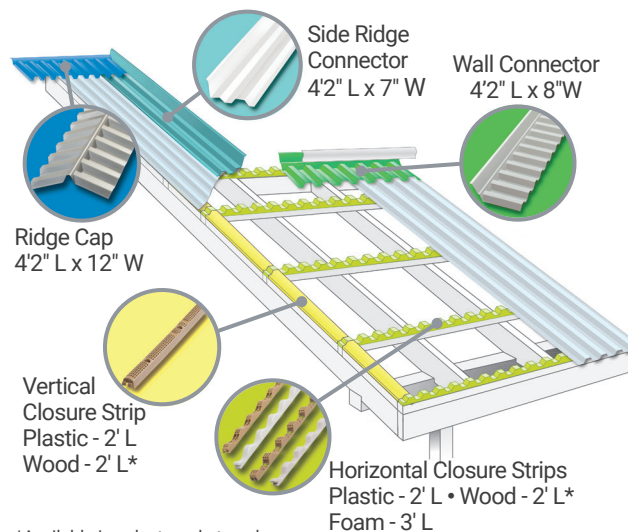

*Available in select markets only.

Special EPDM Washered Fasteners

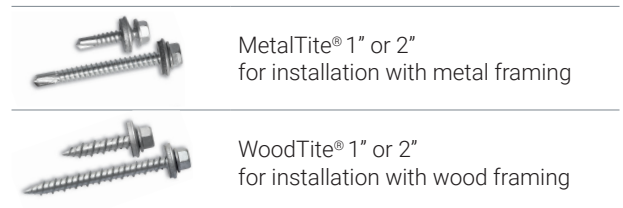

Ultimate In Performance and Durability

Palram Products Compared	PALRUF® GOOD	SUNTUF® BETTER	SUNTUF® BEST
Impact resistance	Good	Better	Best
Chemical resistance	Best	Good	Good
Snow load capacity	Good	Better	Best
Temperature range	-4°F to 120°F (-20°C to 49°C)	-40°F to 212°F (-40°C to 100°C)	-40°F to 212°F (-40°C to 100°C)
UV Protection	100%	100%	100%
Flame resistance	Good	Good	Good
Cost effectiveness	Good	Better	Best
Warranty	5 Year Limited	10 Year Limited	Lifetime Limited

Regulatory Code Compliance Certification

Organization	Standard	Classification
CCMC	National Building Code (NBC) (Canopy Covering)	Compliant (CCMC Eval. Rep. 13450-R)
Miami Dade County	Florida Building Code (FBC)	Approved
ICC (Int'l Code Council)	International Building Code (IBC)	ESR-1893
City of Los Angeles	Los Angeles Building Code (LABC)	RR 25298

*For detailed information on physical properties, please visit suntuf.com.



PALRAM AMERICAS
9735 Commerce Circle
Kutztown, PA, 19530 USA
800.999.9459
ContactUs.USA@palram.com
palram.com/us



Distributed By EZ Outdoor Coverings

EZ Outdoor Coverings
sales@ezoutdoorcoverings.com
833-937-9918



Show Us Your Completed Project!

Once you're done, show it off!
We'd love to see what you've built. Scan to upload project images!



For more information, installation instructions and videos, scan the QR code, or visit:
www.palram.com/us/suntuf

SUNTUF Polycarbonate Panels are lifetime warranted from the purchase date, not to lose more than 10% of their light transmission (when tested in accordance with ASTM D 1003-77). The above warranty shall apply only if the panels are installed, used and maintained in accordance with Palram recommendations and specifications. Suntuf also features a limited ten year warranty against hail damage. For complete warranty details, contact Palram at 1-800-999-9459, or visit us online at palram.com/us.



F 402 031825 KE

Before You Begin


Make sure the color of all panels match. Be sure panel and horizontal closure support strip fit together... SUNTUF polycarbonate panels are square. Snow, wind and weather loads should be considered when designing the slope degree of your structure (Min. 1½" in 12"). Before installation, check local building codes for relevant specifications and recommendations. Follow local codes at all times.

Transportation, handling and storage: Do not transport, leave or store panels in direct sun before or during installation. For outdoor storage, cover securely with a white opaque polyethylene sheet to avoid solar heat gain between the panels. Sunlight is magnified when passing through uncovered sheets, increasing the temperature of the sheets, which leads to degradation and distortion. Penetration of water between the sheets in storage will accentuate this heat gain. Therefore, it is recommended to store the panels indoors. Panels will withstand heat when properly installed and ventilated. Store the panels stacked evenly on a horizontal flat surface with longer lengths on the bottom. Do not stack other items on top of panels. If panels are not stacked directly on floor, be sure to support evenly.

LOAD SUPPORT TABLE				
Pounds per Sq. Ft.	20	30	40	50
Cross Support Bracing	36"	30"	24"	16"

Flexible enough for curved structures: SUNTUF panels may be used in curved applications, as long as the radius of the curve is not less than 20 feet.

Suntuf Accessories

Accessories		Dimensions		
	1	SUNTUF Ridge Cap Flashing/Connector	4' 2" L x 12" W	
	2	SUNTUF Side Ridge Flashing/Connector	4' 2" L x 7" W	
	3	SUNTUF Head Wall Flashing/Connector	4' 2" L x 8" W	
	4	SUNTUF Vertical Closure Strip	Plastic 7/8" H x 1-3/16" W x 24" L	Wood 7/8" H x 1-3/16" W x 24" L*
	5	SUNTUF Horizontal Closure Strip	Plastic 3/4" H x 7/8" W x 24" L	Foam 3/4" H x 7/8" W x 36" L
	6	Special EPDM Washered Fasteners	Metalite 1" & 2"	Woodtite 1" & 2"









*Available in select markets only.

BE SURE TO CAREFULLY READ ALL INSTRUCTIONS

SAFETY:

Never walk on sheets. Use a board placed across at least three rafters to spread the load.

INSTALLATION DETAILS FOR A TYPICAL CANOPY STRUCTURE

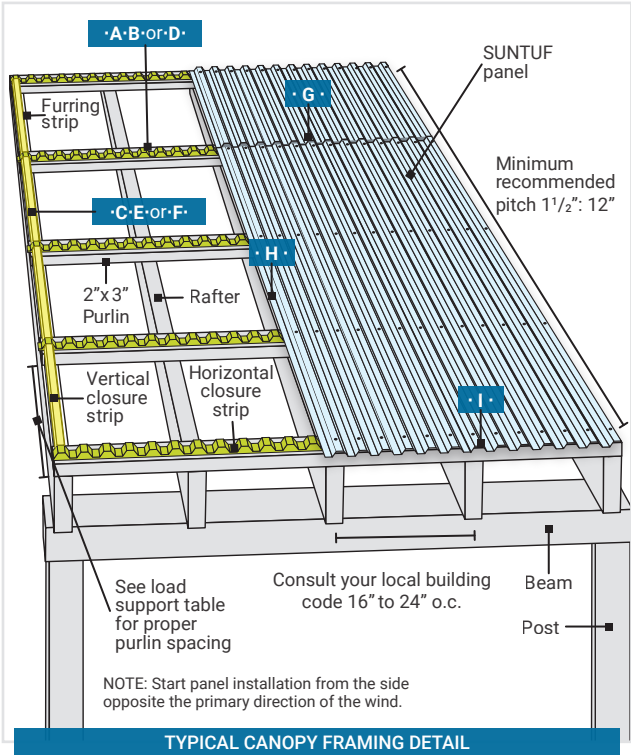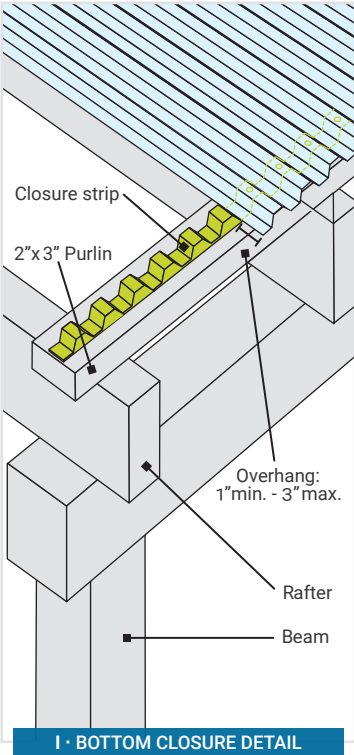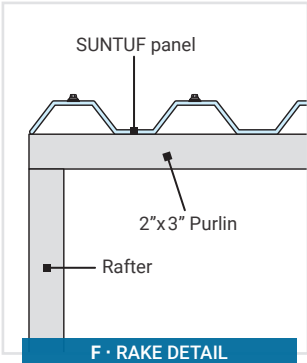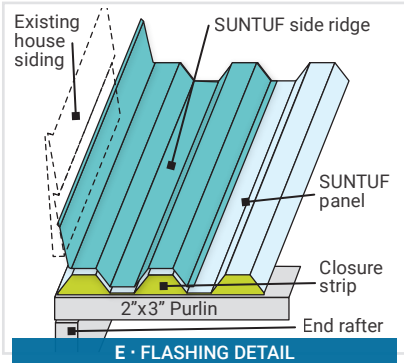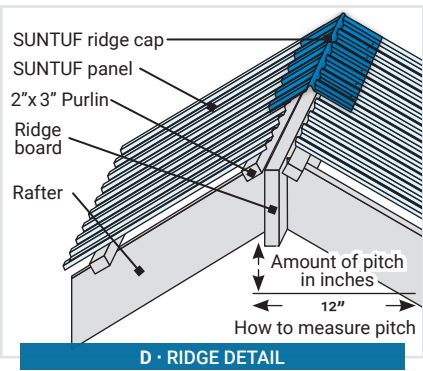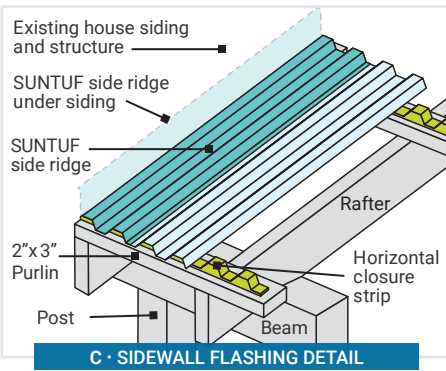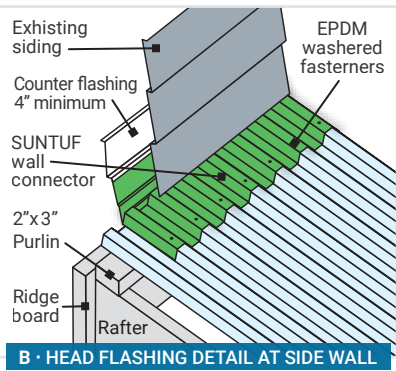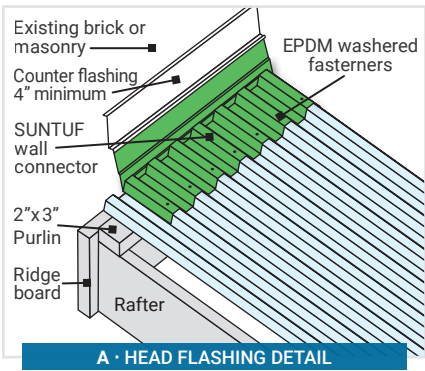

INSTALLATION NOTES:

Install panels with the label side facing toward the sky (sheet corrugations at each end will face down).

To Cut Panels: Use either a circular saw with a plywood blade reversed, a utility knife and a straight edge, or a pair of snips. Support the sheets to avoid vibration and cut at slow speed. Up to five panels can be cut with a circular saw.

Pitch: This is the amount of height in inches the rafter rises over a 12" run. Minimum slope is 1½" in 12" (see figure D). Never install panels on flat roofs.

Purlins/Cross Supports: Cross supports (purlins) must be no more than 36" apart for SUNTUF. Cross supports should be at least 2" x 2" lumber.

Sealants: For SUNTUF sheets, it is recommended you use any sealant/adhesive that is recommended for polycarbonate materials. (See figure H).

Closure Strips: Made from either plastic, wood or foam, corrugated horizontal closure strips are required. They are used horizontally under the panels as fastener supports. Plastic corrugated horizontal closure strips are recommended. Plastic vertical closure strips are recommended for finishing the outside edges.

Ventilation: Ventilation is recommended to avoid condensation and heat build up.


Fasteners: Use Palram brand EPDM Washered fasteners only. NEVER use nails. Predrill all fastener holes with a 1/4" drill bit to accommodate for the thermal movement of the panel. Failure to accommodate thermal movement will cause buckling of the sheet. Attach fasteners on the crown of every other rib in the horizontal direction. In high wind areas, fasten on the crown of every rib. Use 2" fasteners for all roof applications. DO NOT overtighten fasteners causing the rubber washer to compress.

TIP: Tighten all fasteners until they are "snug". If the EPDM washer becomes deformed, the fastener is too tight!

Care and Maintenance: Avoid contact with chemicals, paints, adhesives or other synthetic materials that are incompatible with polycarbonate. Never use glass cleaners with ammonia, or ammonia based products. Clean with lukewarm soapy solution using a soft cloth or sponge. Do not use abrasive brushes as these will mark the surface. For full care and maintenance info, visit Suntuf.com

Watch the DIY Products Installation Video Online. A video presentation of basic handling and installation for DIY corrugated products. Suntuf.com



	Metalite Special EPDM washed fasteners for fastening to metal framing.
	Woodtite Special EPDM washed fasteners for fastening to wood framing.

Inasmuch as Palram Americas has no control over the use (and/or installation method) to which others may put this material, it does not guarantee that the same results as those described herein will be obtained. Each user of the material should make their own test to determine the suitability of the material for their own particular use. In the event of a warranty claim for product failure, Palram Americas reserves the right to inspect any or all of the sheets involved and the installation site itself while the sheets are still in their original position and have not been removed or moved or altered in any way.

© 2025 Palram Americas